

Bug



Height adjustable polypropylene backrest with polyurethane foam
Tickness 4,50 cm
Density 21 kg/cbm

Permanent contact

Wooden seat with polyurethane foam
Tickness 5,50 cm
Density 25 kg/cbm

Height adjustable seat plate

Black gas lift H 135

Nylon base d.640

Hard castors d.50

Optional

Castors



Soft castors
d.50



Glides

Base



Pyramidal chromed
steel base d.640

Mechanismo



3 levers asynchro
mechanism with
tension control

Arms



Fixed arms
TEKNO



Adjustable arms
STAR
1D PP / 1D PU / 2D PU




Adjustable arms
FRITZ 1D PP



Adjustable arms
MIX 3D

Dimensions

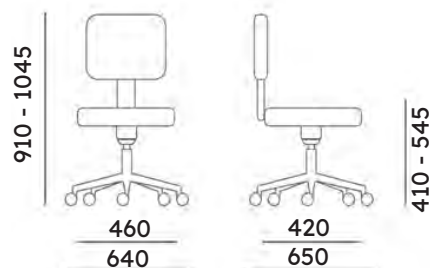

Weight	10,60 kg
Volume	0,13 cbm
Guarantee	2 years
Certifications	Omologazione IIM FR artificial leather

Fabrics

FR fabric

CAT. 200
380 gr/ m2
100% POLYPROPYLENE
> 25.000 Martindale
IIM - BS 5852 - CRIB 5

Bond

CAT. 300
250 gr/ m2
100% POLYPROPYLENE
> 150.000 Martindale
IIM - BS 5852 - CRIB 5

Artificial leather

CAT. 300
430 gr/ m2
88% PVC, 12% POLYPROPYLENE
> 100.000 Martindale

Bali

CAT. 300
490 gr/ m2
100% POLYPROPYLENE
> 100.000 Martindale
BS 5852 SMALL FLAME

FR artificial leather

CAT. 400
550 gr/ m2
85% PVC, 14% PES, 1% PU
> 100.000 Martindale
IIM - BS 5852 - EN 1021

Soft

CAT. 400
653 gr/ m2
100% POLYPROPYLENE
> 90.000 Martindale

Lord

CAT. 400
390 gr/ m2
100% POLYPROPYLENE
> 100.000 Martindale
BS 5852 - EN 1021-1

King

CAT. 400
290 gr/ m2
100% POLYPROPYLENE TREVIRA CS
> 100.000 Martindale
IIM - C1 - IMO - AM18 - BS 7176

Iron

CAT. 600
715 gr/ m2
88% PVC, 7% POLYPROPYLENE, 4% COTTON, 1% PU
> 200.000 Martindale
IIM - BS 5852 - EN 1021
Antimicrobial Hypoallergenic

Use and maintenance

FABRIC

Cleaning: see the maintenance and washing tips in the fabric tab of the color chart.

Use: it is recommended to pay attention to use as it can be torn or cut.

LEATHER

Cleaning: clean with a wet white cloth soaked in water only. Use quality products for cleaning the skin carefully following the instructions of the manufacturer of the cleaning product. In case of doubt, it is advisable to test the product on a part hidden from view to verify the result, waiting at least 24 hours for any problems.

Use: remember that the skin is a delicate material therefore it is recommended to take care during use.

WOOD

Cleaning: Wipe with a damp cloth and soaked in warm water. Always dry after cleaning. Immediately remove any liquid substances or other residues to avoid absorption.

Use: wood surfaces, being a natural material, could, over time, undergo color changes with the use and exposure to light. Remember that wood cannot withstand direct heat sources on the surface.

METAL

Cleaning: both steel or aluminium metal surfaces and painted surfaces must be cleaned with a damp cloth and soaked in hot water. For stubborn stains it is possible to dilute liquid neutral soap in water in moderation. Always dry after cleaning with a soft cloth or deerskin. Do not use creams and pastes to clean steel, do not use chlorine, do not use bleach and other aggressive detergents. Not recommended to use abrasive pastes, scouring pads and abrasive sponges that can scratch metal surfaces.

Use: pay attention to food stains that can leave indelible stains on surfaces.

Disposal and recycling

The product is designed to allow disassembly at the end of its useful life: parts not subject to normal wear, can be reused, recycled or recovered. The disposal must be carried out in the spaces dedicated to this activity.