

Walker S



Height adjustable seat in natural painted wood or with polyurethane foam

Thickness 6,00 cm

Density 30 kg/cbm


Height adjustable seat plate

Gas lift H 370 with chromed ring

Nylon base d.680 with metal ring

Hard castors d.50

Dimensions

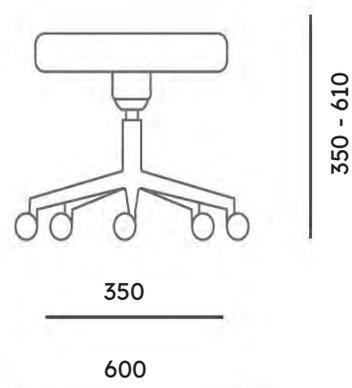

Weight 8,00 kg

Volume 0,13 cbm

Guarantee 2 years

Certifications -

Optional

Ruote



Soft castors
d.50



Glides

Base



Pyramidal chromed
steel base d.700

Fabrics

FR fabric

CAT. 200
380 gr/ m2
100% POLYPROPYLENE
> 25.000 Martindale
IIM - BS 5852 - CRIB 5

Bali

CAT. 300
490 gr/ m2
100% POLYPROPYLENE
> 100.000 Martindale
BS 5852 SMALL FLAME

Lord

CAT. 400
390 gr/ m2
100% POLYPROPYLENE
> 100.000 Martindale
BS 5852 - EN 1021-1

Bond

CAT. 300
250 gr/ m2
100% POLYPROPYLENE
> 150.000 Martindale
IIM - BS 5852 - CRIB 5

FR artificial leather

CAT. 400
550 gr/ m2
85% PVC, 14% PES, 1% PU
> 100.000 Martindale
IIM - BS 5852 - EN 1021

King

CAT. 400
290 gr/ m2
100% POLYPROPYLENE TREVIRA CS
> 100.000 Martindale
IIM - C1 - IMO - AM18 - BS 7176

Artificial leather

CAT. 300
430 gr/ m2
88% PVC, 12% POLYPROPYLENE
> 100.000 Martindale

Soft

CAT. 400
653 gr/ m2
100% POLYPROPYLENE
> 90.000 Martindale

Iron

CAT. 600
715 gr/ m2
88% PVC, 7% POLYPROPYLENE, 4% COTTON, 1% PU
> 200.000 Martindale
IIM - BS 5852 - EN 1021
Antimicrobial Hypoallergenic

Use and maintenance

FABRIC

Cleaning: see the maintenance and washing tips in the fabric tab of the color chart.
Use: it is recommended to pay attention to use as it can be torn or cut.

LEATHER

Cleaning: clean with a wet white cloth soaked in water only. Use quality products for cleaning the skin carefully following the instructions of the manufacturer of the cleaning product. In case of doubt, it is advisable to test the product on a part hidden from view to verify the result, waiting at least 24 hours for any problems.
Use: remember that the skin is a delicate material therefore it is recommended to take care during use.

WOOD

Cleaning: Wipe with a damp cloth and soaked in warm water. Always dry after cleaning. Immediately remove any liquid substances or other residues to avoid absorption.
Use: wood surfaces, being a natural material, could, over time, undergo color changes with the use and exposure to light. Remember that wood cannot withstand direct heat sources on the surface.

METAL

Cleaning: both steel or aluminium metal surfaces and painted surfaces must be cleaned with a damp cloth and soaked in hot water. For stubborn stains it is possible to dilute liquid neutral soap in water in moderation. Always dry after cleaning with a soft cloth or deerskin. Do not use creams and pastes to clean steel, do not use chlorine, do not use bleach and other aggressive detergents. Not recommended to use abrasive pastes, scouring pads and abrasive sponges that can scratch metal surfaces.
Use: pay attention to food stains that can leave indelible stains on surfaces.

Disposal and recycling

The product is designed to allow disassembly at the end of its useful life: parts not subject to normal wear, can be reused, recycled or recovered. The disposal must be carried out in the spaces dedicated to this activity.